



# Huron Bluestone

## Data Sheet


### Wet Slip Resistance

Finish	Value	Classification
Scratched	70 (+2)	P5
Bushhammered	59 (+2)	P5
Sandblasted	65 (+2)	P5
Leather	47 (+2)	P4
Honed	39 (+2)	P3

### Analysis

### Results

Mean Dried Compressive Strength (MPa)	114 (+1.4)
Mean Soaked Compressive Strength (MPa)	84 (+1.0)
Mean Mass Resistance to Salt Attack (%)	0.45 (+0.03)
Mean Bulk Specific Gravity (kg/m <sup>3</sup> )	2.716 (+2)
Mean Absorption by Volume (%)	2.81 (+0.08)
Mean Absorption by Weight (%)	1.04 (+0.03)
Mean Index of Abrasion Resistance (Ha)	36.9 (+0.6)
Mean Dried Modulus of Rupture (MPa)	14.3 (+0.2)
Mean Soak Modulus of Rupture (MPa)	15.9 (+0.2)
Flexural Strength Dried (MPa)	12.3 (+0.2)
Flexural Strength Soaked	12.7 (+0.2)
Solar Reflectance Index Method - High Wind	15.3 (+1.6)

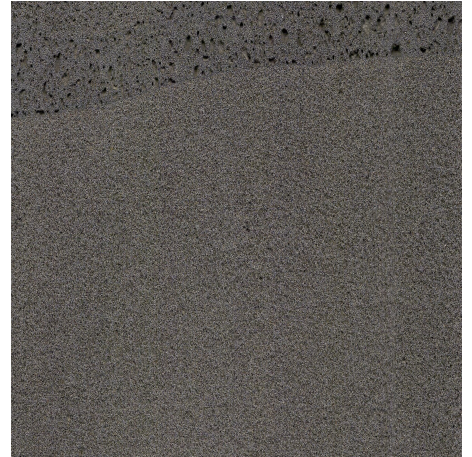

OUTDOOR FINISH  
SANDBLASTED

[Disclaimer — Due to the inherent variability of natural stone, the results are indicative.]