



George Grey Data Sheet


Wet Slip Resistance

Finish	Value	Classification
Exfoliated	59 (± 2.2)	P5

Analysis

Results

Abrasion Resistance (Ha)	105.4 (± 4.9)
Bulk Specific Gravity (Kg/m ³)	2,712 (± 2)
Crystalline Silica (%)	31
Flexural Strength (MPa)	
Average Dried	13.4 (± 0.25)
Average Soaked	13.9 (± 0.26)
Luminous Reflectance	
Average Dried (Yd)	32.8
Average Soaked (Yw)	17.7
Modulus of Rupture (MPa)	
Average Dried	13.6 (± 0.24)
Average Soaked	15.3 (± 0.27)
Unconfined Compressive Strength (MPa)	
Average Dried	147 (± 1.8)
Average Soaked	135 (± 1.6)
Water Absorption (%)	
Average by Volume	0.56 (± 0.09)
Average by Weight	0.21 (± 0.03)

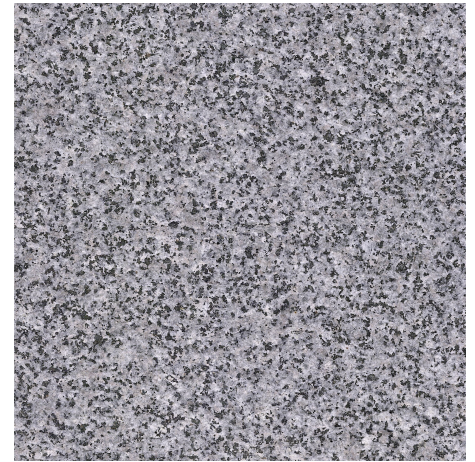

FINISH > EXFOLIATED

Disclaimer: Due to the inherent variability of natural stone, the results are indicative.