




Samson White Data Sheet

Wet Slip Resistance

Finish	Value	Classification
Exfoliated	62 (± 2)	P5
Bush Hammered	65 (± 2)	P5
Sandblasted	64 (± 2)	P5

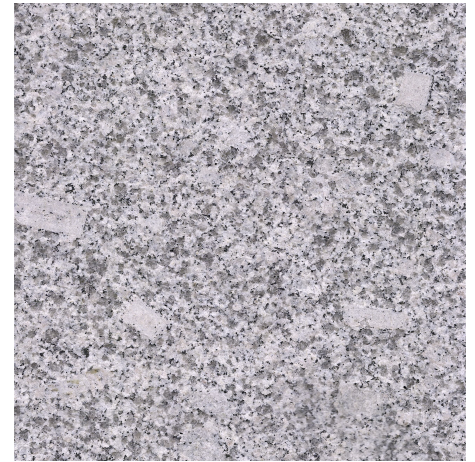

FINISH > EXFOLIATED

Analysis

Results

Abrasion Resistance (Ha)	101.5 (± 12.3)
Bulk Specific Gravity (Kg/m ³)	2,632 (± 2)
Crystalline Silica (%)	28.8
Luminous Reflectance	
Average Dried (Yd)	43.9
Average Soaked (Yw)	39.2
Modulus of Rupture (MPa)	
Average Dried	11.7 (± 0.1)
Average Soaked	12.2 (± 0.1)
Resistance to Salt Attack (%)	0.03 (± 0.03)
Solar Reflectance Index	
Low Wind	52.0 (± 2.4)
Medium Wind	55.8 (± 2.1)
High Wind	58.3 (± 1.8)
Unconfined Compressive Strength (MPa)	
Average Dried	159 (± 1.9)
Average Soaked	154 (± 1.9)
Water Absorption (%)	
Average by Volume	0.77 (± 0.08)
Average by Weight	0.29 (± 0.03)

Disclaimer: Due to the inherent variability of natural stone, the results are indicative.