
Annalyce Gold Data Sheet

Wet Slip Resistance

Finish	Value	Classification
Exfoliated	59 (±2)	P5

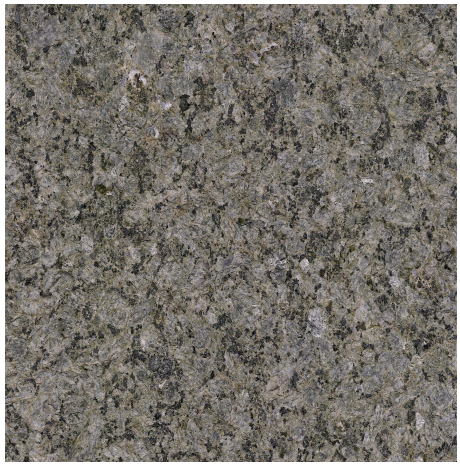

FINISH > EXFOLIATED

Analysis	Results
Abrasion Resistance (Ha)	102.9 (±12.6)
Bulk Specific Gravity (Kg/m3)	2.617 (±2)
Modulus of Rupture (MPa)	
Average Dried	11.3 (±0.1)
Average Soaked	11.8 (±0.1)
Resistance to Salt Attack (%)	0.01 (±0.03)
Unconfined Compressive Strength (MPa)	
Average Dried	127 (±1.5)
Average Soaked	125 (±1.5)
Water Absorption (%)	
Average by Volume	0.77 (±0.08)
Average by Weight	0.30 (±0.03)

Disclaimer: Due to the inherent variability of natural stone, the results are indicative.

Sam the Paving Man
Unit A, 61-65 Roberts Road, Greenacre NSW 2190

samthepavingman.com.au
+ 61 2 9642 5666

Find us on our socials:
Instagram LinkedIn